☐ **OPL-405CF**

Omnipro

Two - Handle Lavatory Faucet

Product Spec Sheet

Features & Benefits

OPL-405CF
Chrome Finish

- This Product Contains Less Than 0.25% Weighted Average Lead Content On Wetted Surfaces
- Metal Lever Handle
- Washerless Cartridge
- 50/50 Push Pop-Up
- Max Flow Rate 1.2 GPM (4.5L/Min) At 60 PSI (ASME A112.18.1/A112.18.1)

Approvals:

Meets or Exceeds The Following:

* ANSI/ASME A112.18.1/A112.18.1
* NSF/ANSI 61 - Sec. 9
* NSF/ANSI 372
* IAPMO/cUPC
* CA AB1953
* ADA Compliant
* EPA WaterSense
* NSF/ANSI/CAN 61 : Q ≤ 1

TEL: 800-217-4603

Visit Our Web Site : www.omniprofaucets .com

☐ OPL-405CF

Omnipro

Two - Handle Lavatory Faucet

Product Spec Sheet

No.	Name	Part No.
1	Screw / *Tornillo*	RP50210
2	Handle H / *Llave H*	RP13765*
3	Handle C / *Llave C*	RP13766*
4	Bonnet / *Bonete*	RP70678
5	Washer / *Arandela*	RP64124
6	Cartridge / *Cartucho*	RP22010
7	Seat & Spring / *Base y resorte*	RP22008
8	Gasket / *Junta*	RP80751
9	Aerator / *Aireado*	RP30190*
10	Easy install nut / *Tuerca fácil de instalar*	RP56095
11	Coupling nut / *Tuerca de acoplamiento*	RP56002
12	Pop-up assembly / *Ensamblaje emergente*	RP40137*

* Specify Finish
* Especifíque el Acabado

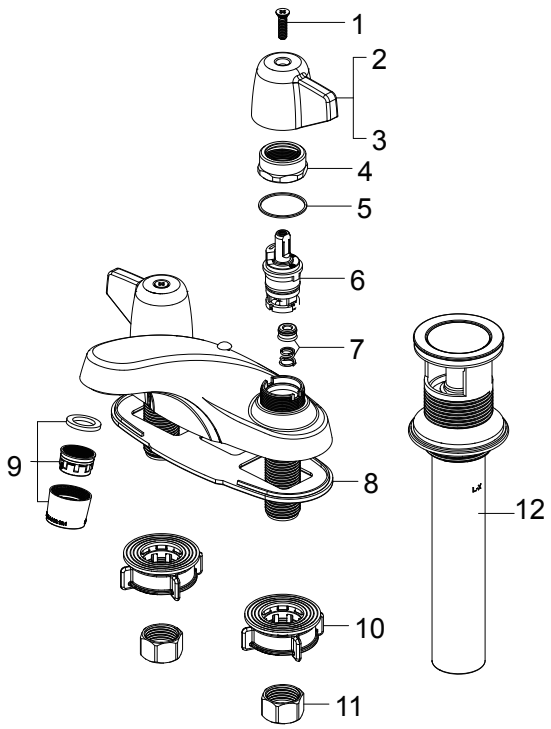

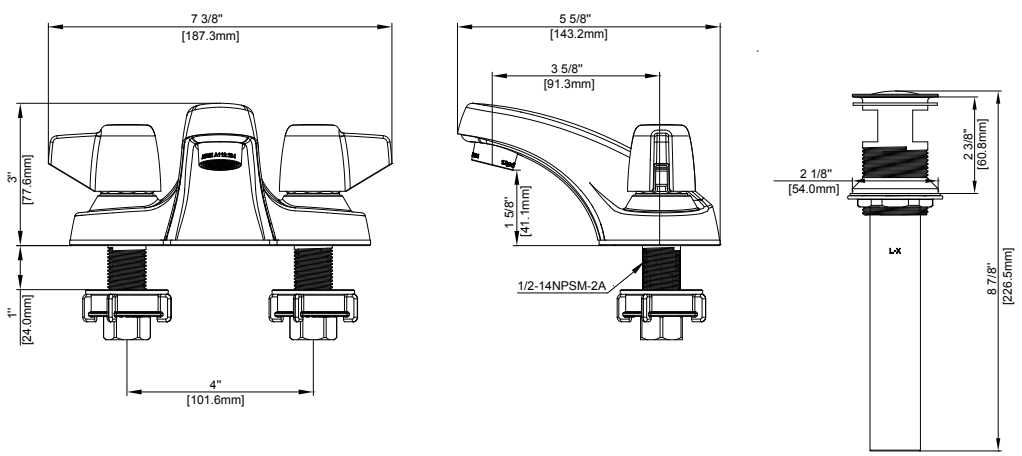

TEL: 800-217-4603
Visit Our Web Site :
www.omniprofaucets.com