☐ **OPL-480CF** ☐ **OPL-480BNF** Omnipro

Two - Handle Lavatory Faucet

Product Spec Sheet

Features & Benefits

- This Product Contains Less Than 0.25% Weighted Average Lead Content On Wetted Surfaces
- Metal Lever Handle
- Ceramic Cartridge
- 50/50 Push Pop-Up
- Max Flow Rate 1.2 GPM (4.5L/Min) At 60 PSI (ASME A112.18.1/A112.18.1)

OPL-480CF
Chrome Finish

OPL-480BNF
Brushed Nickel Finish

Approvals:

Meets or Exceeds The Following:

* ANSI/ASME A112.18.1/A112.18.1
* NSF/ANSI 61 - Sec. 9
* NSF/ANSI 372
* IAPMO/cUPC
* CA AB1953
* ADA Compliant
* EPA WaterSense
* NSF/ANSI/CAN 61 : Q ≤ 1

TEL: 800-217-4603

Visit Our Web Site : www.omniprofaucets .com

☐ **OPL-480CF** ☐ **OPL-480BNF**

Omnipro

Two - Handle Lavatory Faucet

Product Spec Sheet

No.	Name	Part No.
1	Handle / *Llave*	RP13308*
2	Set screw / *Tornillo de fijación*	RP50002
3	Index H / *Índice H*	RP10004
4	Index C / *Índice C*	RP10005
5	Bonnet / *Bonete*	RP70678
6	Cartridge H / *Cartucho H*	RP20067
7	Cartridge C / *Cartucho C*	RP20068
8	Block / *Bloque*	RP70421
9	O-ring / *Aro tórico*	RP60002
10	Aerator / *Aireado*	RP30192*
11	Quick connecting assembly / *Ensamblaje de conexión rápida*	RP70765
12	Quick install nut / *Tuerca de acoplamiento*	RP70769
13	Quick install nut / *Tuerca de acoplamiento*	RP70764
14	Coupling nut / *Tuerca de acoplamiento*	RP56002
15	Pop-up assembly / *Ensamblaje emergente*	RP40317*

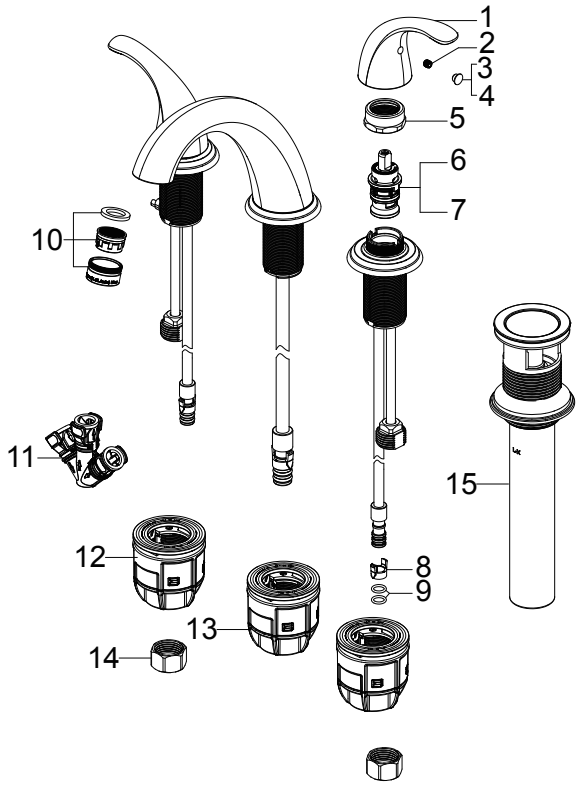

* Specify Finish
* Especifíque el Acabado

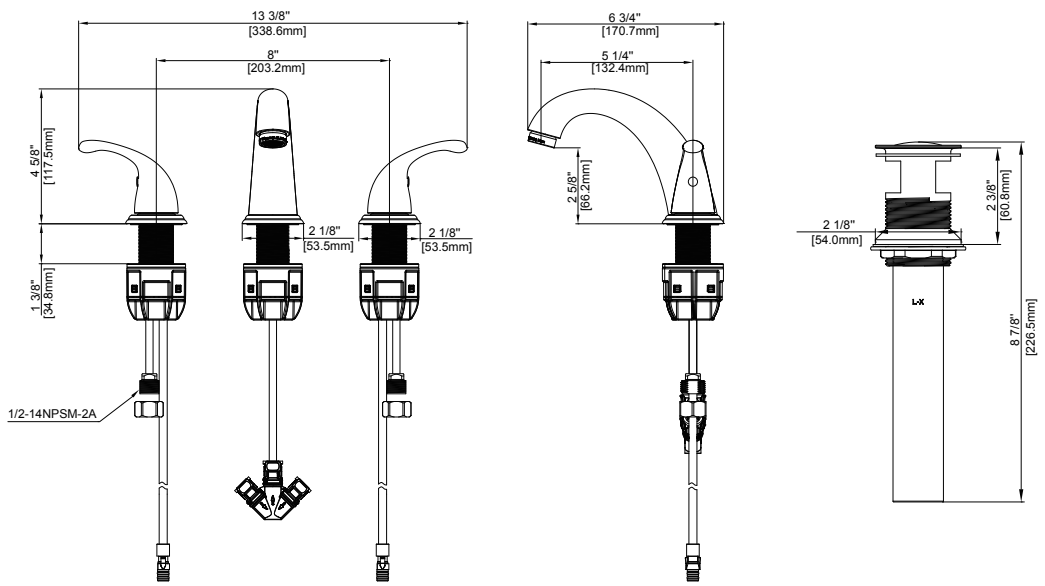

TEL: 800-217-4603
Visit Our Web Site :
www.omniprofaucets.com