☐ **OPV-832C** ☐ **OPV-822C**

Omnipro

Two Handle Tub & Shower Faucet

Product Spec Sheet

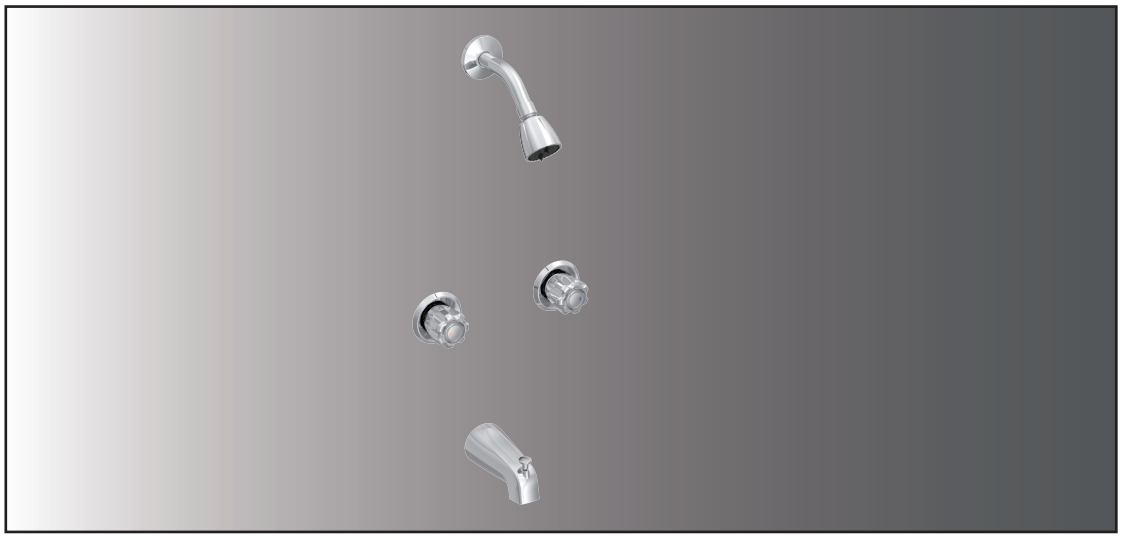

Features & Benefits

- Acrylic Round Handles
- Washerless Cartridges
- Non Pressure Balanced
- Diverter Slip Fit Spout
- Max Flow Rate 1.75 GPM (6.6 L/MIN) At 80 PSI
- Min Flow Rate 1.3 GPM (4.9 L/min) at 45 psi (ASME A112.18.1M/A112.18.1)

OPV-832C
Tub & Shower Faucet
Chrome Finish

OPV-822C
Shower Only Faucet
Chrome Finish

Approvals:

Meets or Exceeds The Following:

* ANSI/ASME A112.18.1M/A112.18.1
* IAPMO/cUPC

* WaterSense Only On Models Containing Showerheads

TEL: *800-217-4603*

Visit Our Web Site : www.omniprofaucets.com

☐ **OPV-832C** ☐ **OPV-822C**

Omnipro

Two Handle Tub & Shower Faucet

No.	Name	Part No.
1	Shower Head	635018
2	Shower Arm	616063
3	Shower Arm Flange	620031
4.1	Index Button- Cold	624140
4.2	Index Button- Hot	624141
5	Screw	642046
6	Acrylic Handle	623107
7	Escutcheon	620010
8	Sleeve	622009
9	Stem Extension-Hot	627014
10	Seat & Spring Set	627009
11	Cartridge Assrmbly	626001
12	Union Nut	644003
13	Spout W/Diverter	617005
14	Hex Wrench (H 4* 23mm L * 56mm L)	640009
15	Plug	642121

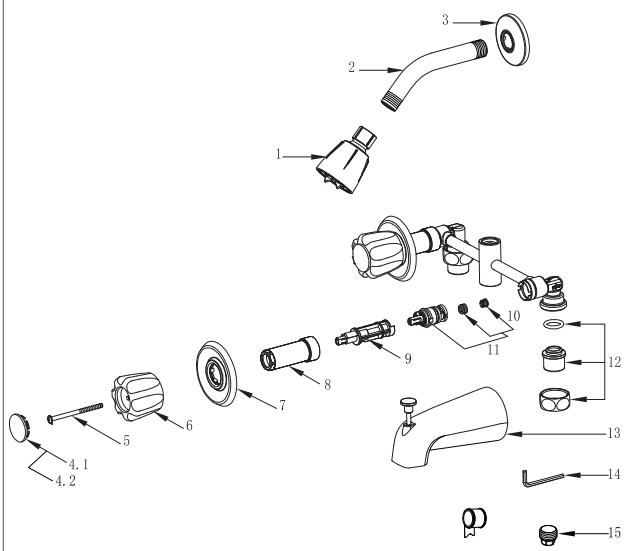

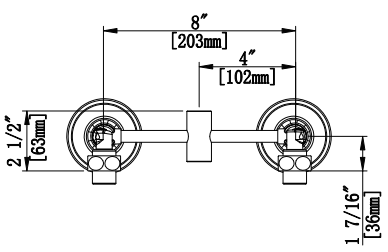

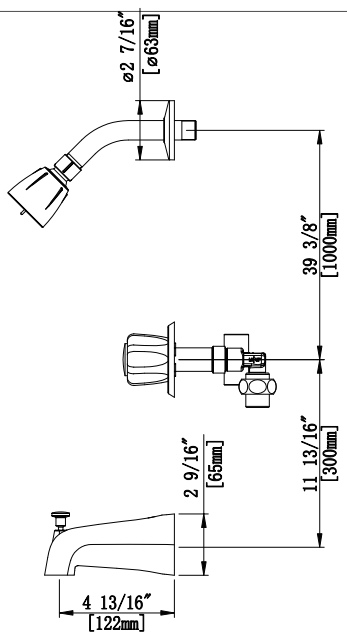



Product Spec Sheet

TEL: 800-217-4603

Visit Our Web Site : www.omniprofaucets.com